


Safety Hook– Single Friction Type

SAFETY HOOK

<u>JCP Models</u>	<u>Description</u>
J-1-5001	Weld Mount Safety Hook (shown)
J-1-5002	Bolt Mount Safety Hook (shown)
J-1-5003	Weld Mount Safety Hook w/ Embed
J-1-5004	Weld Mount Safety Hook w/ Stainless Steel Embed

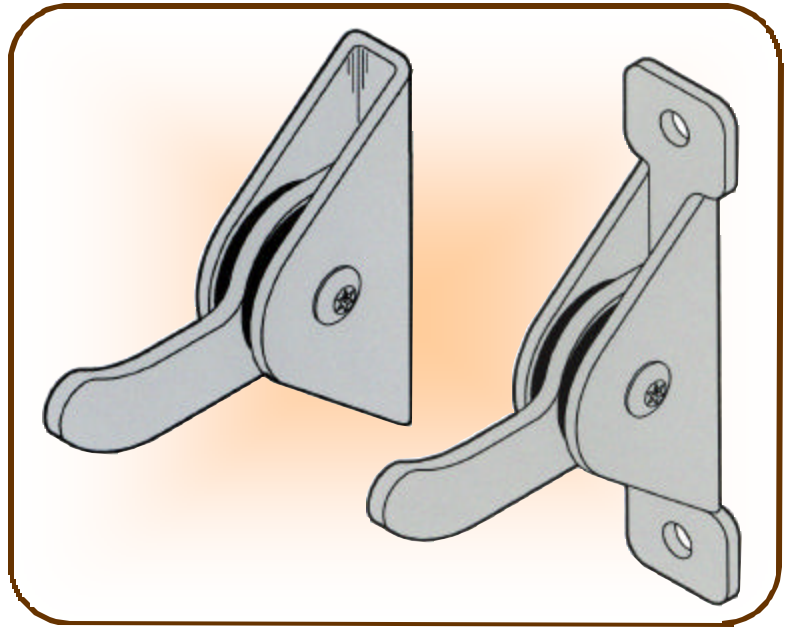

JCP Specifications: Weld mount friction type safety hook body is fabricated from 11 gauge stainless steel and is 3-1/8" high x 1-3/8" long x 5/8" wide. The 3" long hook is fabricated from 8 gauge stainless steel and the assembly with two 1/8" thick rubber washers is secured with a 1/4-20 x 1/2" button head Torx® w/ pin screw. The friction type safety hook is designed to collapse at approximately 40 pounds of pressure and can be adjusted. The weld mount safety hook is designed to be welded to other products such as a shelf, or can be welded directly to a plate wall.

The bolt mount safety hook is similar to the weld mount other than it has a mounting tap on the top and bottom with a 1/4" diameter hole for installation to a wall with security anchors provided by the installer.

The back plate of the embed for the weld mount safety hook is fabricated from 7 gauge HRPO steel and is 3" x 5". The anchor strap is fabricated from 12 gauge HRPO steel and is 2" wide and 4" long. The embed assembly will receive one shop coat of our standard primer.

The back plate of the stainless steel embed for the weld mount safety hook is fabricated from 7 gauge stainless steel and is 3" x 5". The anchor strap is fabricated from 12 gauge stainless steel and is 2" wide and 4" long. All stainless steel will have a random orbital finish.

The installer of the embeds will place the embed on the appropriate block course and lay the block in and around the embed straps. The installer will insert a #4 rebar (provided by installer) through each anchor strap and verify that the embed is flat and true. The block wall must be grouted solid for proper anchorage.

JAILS CORRECTIONAL PRODUCTS A Division of **FABCOR, Inc.**

350 South Ohio Street, P.O. Box 58
Minster, Ohio 45865
www.fabcor.com

Phone: (419) 628- 4428
Fax: (419) 628- 2899
E-mail: jails@fabcor.com

Equipment Assembly

EA-09.01

Revision C

©2003 Fabcor, Inc.